



# HILFLEX

Hilltop Spiral Binding is a polyethylene spiral cable binding. Simple to install, it is designed for cable bundling and mechanical protection.

# Spiral Cable Binding

## Features & Benefits

- Halogen Free
- Operating temperature -50°C to +85°C
- Enables cables to be led out at any point
- Follows any route taken by the cable


## Applications

Hilflex Spiral binding is manufactured from low density polythene and offers a simple and fast method of binding and protecting cable looms whilst at the same time allowing wires to be bought from the loom.

### Standard Colours & Colour Codes

0 = Black	6 = Blue
2 = Red	8 = Grey
3 = Orange	9 = White
4 = Yellow	X = Clear

### HILFLEX-SB-3.0-0-CLS

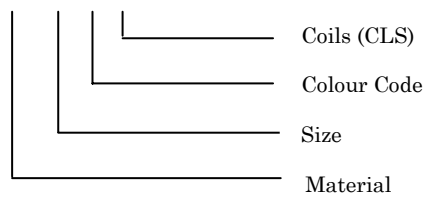

Nominal Size	Capacity (mm)	ID (mm)	Wall Thickness (mm)	Pitch	Ordering Description
3	1.5 – 7	1.5	0.75	5	HILFLEX-SB-3.0- <i>colour code</i> -CLS
6	5 – 20	4	1	8	HILFLEX-SB-6.0- <i>colour code</i> -CLS
12	10 – 40	9	1.5	10	HILFLEX-SB-12.0- <i>colour code</i> -CLS
22	25 - 100	19	1.5	10	HILFLEX-SB-22.0- <i>colour code</i> -CLS

## Performance

Property	Units	Results
Operating Temperature Range	°C	-50 to +85
Tensile Strength @ Break	MPa	12
Ultimate Elongation	%	550
Dielectric strength	kV/mm	30