



Supplied as continuous form or cut pieces to any length. Also supplied as Printed Marker Sleeves to customer's requirements.

Applications

Hilltop PTFE sleeving and sleeves are manufactured from extruded polytetrafluoroethylene (PTFE). This particular grade of sleeving is intended for use in applications where very high temperature is involved or where severe contamination from fluids may occur. Available as plain cut sleeves, continuous sleeving and printed markers.

Standard Colours & Colour Codes


0 = Black	X = Clear

Performance

Continuous operating temperature
Insulation resistance

-70°C to +250°C
1 x 10⁵ megohm (min)

PF30-0-CLS

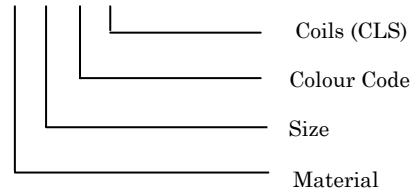

Alternative wall thickness and other inside diameters are available subject to special order

Inside diameter	Wall thickness	Ordering description
mm	mm	
0.33	0.20	PF30-colour code-CLS
0.41	0.23	PF28-colour code-CLS
0.51	0.25	PF26-colour code-CLS
0.58	0.25	PF24-colour code-CLS
0.72	0.25	PF22-colour code-CLS
0.89	0.30	PF20-colour code-CLS
1.02	0.30	PF19-colour code-CLS
1.12	0.30	PF18-colour code-CLS
1.27	0.30	PF17-colour code-CLS
1.42	0.30	PF16-colour code-CLS
1.57	0.30	PF15-colour code-CLS
1.73	0.30	PF14-colour code-CLS
1.93	0.30	PF13-colour code-CLS
2.16	0.30	PF12-colour code-CLS
2.45	0.30	PF11-colour code-CLS
2.72	0.30	PF10-colour code-CLS
3.02	0.38	PF9-colour code-CLS
3.43	0.38	PF8-colour code-CLS
3.84	0.38	PF7-colour code-CLS
4.29	0.38	PF6-colour code-CLS
4.83	0.38	PF5-colour code-CLS
5.44	0.38	PF4-colour code-CLS
6.07	0.38	PF3-colour code-CLS
6.81	0.38	PF2-colour code-CLS
7.62	0.38	PF1-colour code-CLS
8.53	0.38	PF0-colour code-CLS