

HENC - Polyolefin cable caps (PCC). Adhesive lined heat shrinkable polyolefin cable caps.




Features & Benefits

- Resistant to common fluids & chemicals
- Rugged installation
- Seals & protects cable ends from the environmental effects

Standard Colours & Colour Codes

Black - 0

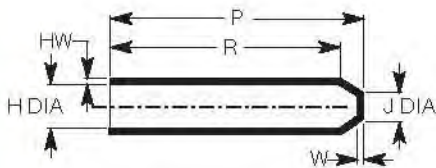

Applications

Adhesive lined heat-shrinkable Polyolefin cable caps used to seal the ends of plastic, rubber and paper insulated cables from moisture, dirt and corrosion. Cable caps are internally coated with a hot-melt adhesive.

They can be used on cables at up to 0.05 MPa internal pressure between -30° and 70°C. Each cable cap covers a wide range of cable sizes as shown in the table below:

Application Range (diameter)	H a (min)	b (max)	P b (±2%)	R b (±2%)	W b (±10%)	Ordering Description
4 - 9	10	3	35	32	2.1	HENC-11/ADH-colour code-PC
5 - 12	15	4.5	45	40	2.7	HENC-15/ADH-colour code-PC
7 - 17	20	6	63	58	2.9	HENC-22/ADH-colour code-PC
17 - 34	40	14.5	102	92	3.2	HENC-33/ADH-colour code-PC
28 - 55	63	24	118	105	3.7	HENC-44/ADH-colour code-PC
37 - 65	75	32	133	113	3.7	HENC-48/ADH-colour code-PC
50 - 100	106	45	164	138	4.25	HENC-55/ADH-colour code-PC
75 - 110	120	57	155	133	4.5	HENC-66/ADH-colour code-PC
80 - 135	148	57	152	-	4.5	HENC-77/ADH-colour code-PC
95- 195	200	87	164	135	5.0	HENC-200/ADH-colour code-PC

Notes: Dimensions in mm
a = as supplied
b = after free recovery
ADH = Adhesive Lined