


# HO-Type Markers

The HO-type cable marker is a thin walled, plasticized PVC Marker which is ideally suited to high density wiring applications.

### Applications

- Thin walled PVC Marker – ideal for densely packed wiring.
- Conforms with BS3858 Type 3
- Ident repeated 3 times around marker
- Colour coded to meet requirements of BS EN 60062 as standard

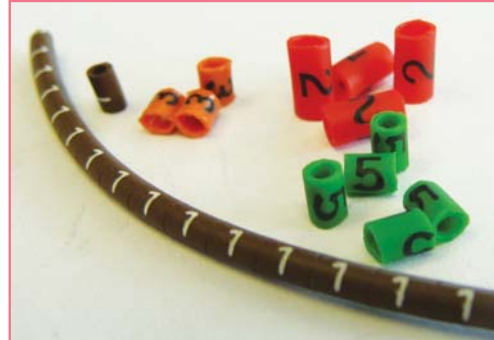

FOR CABLE DIAMETER	FOR CABLE SIZE (BS6004) (BS6231)	MARKER SIZE	MARKER LENGTH	PACKED	ORDER DESCRIPTION
mm	mm		mm		Part Cut
0.6 - 1.0	-	0.75	3.0	1000	HO-0.75
0.9 - 1.3	-	10	3.0	1000	HO-10
1.1 - 1.6	-	12	3.0	1000	HO-12
1.4 - 2.1	-	15	3.0	1000	HO-15
1.9 - 2.8	-	20	5.0	1000	HO-20
2.4 - 3.5	1.0	25	5.0	1000	HO-25
2.9 - 4.8	1.5	30	5.0	1000	HO-30
3.9 - 5.8	2.5 & 4.0	40	5.0	1000	HO-40
5.3 - 8.0	6.0 & 10.0	55	5.0	1000	HO-55

Material	PVC	
Standard Colours	Pink body marked Black:	A-Z and symbols.
	Colour Coded:	0-9
Service Temperature	-65°C to 95°C	
Chemical Resistance	Excellent Resistance to sea water, detergents (10% aqueous), fuels, oils, white and industrial spirit.	
Performance	Meets the requirements of BS3858 1992 Type 3	

### Applicators for HO-Type Cable Markers.

Size	HO-Type Size	Packed	Order Code
1	20	1	APP-HO-20
2	25	1	APP-HO-25
3	30	1	APP-HO-30
4	40	1	APP-HO-40
6	15	1	APP-HO-55