

LEISTER

PLASTIC WELDING

Hilltop
Experts in Wire/Cable Management Solutions

VARIANT T1 TAPE

Quality,
productivity,
ergonomics

VARIANT T1 TAPE 25 mm
«anti-vandalism»



NEW!








VARIANT T1 TAPE 50 mm




VARIANT T1 TAPE: Quality, productivity, ergonomics

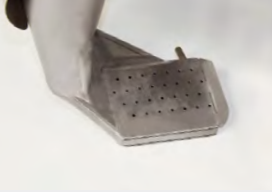Used for welding reinforcement and anti-vandalism tapes in vehicle tarpaulin production. Thanks to the «e-Drive» operating concept, setting the relevant welding parameters couldn't be easier. The tape unwind construction and the newly developed guide rollers guide the tape under the pressure roller, keeping it taut right up to the final inch.

Features

1		User-friendly: Clear display plus "e-Drive" and storable welding parameters
2		Highly flexible: The conversion kits make it possible to work with different types of tape: 2.0 inch (50 mm) reinforcement and 1.0 inch (25 mm) anti-vandalism tapes (see photo).
3		High-tech nozzles: The new nozzle design ensures safe, reliable welding.
4		Feeding to perfection: The new guide rollers make it easy to position the material and keep it taut right up to the final inch.
5		A tight grip: The swiveling tape clamping lever keeps the material extra-taut.
6		Dual-action: The pressure roller can easily be converted from a 2.0 inch (50 mm) width to a 1.0 inch (25 mm) one (anti-vandalism TAPE) or vice versa.
7		Optional: The line laser keeps the VARIANT T1 TAPE firmly on course.

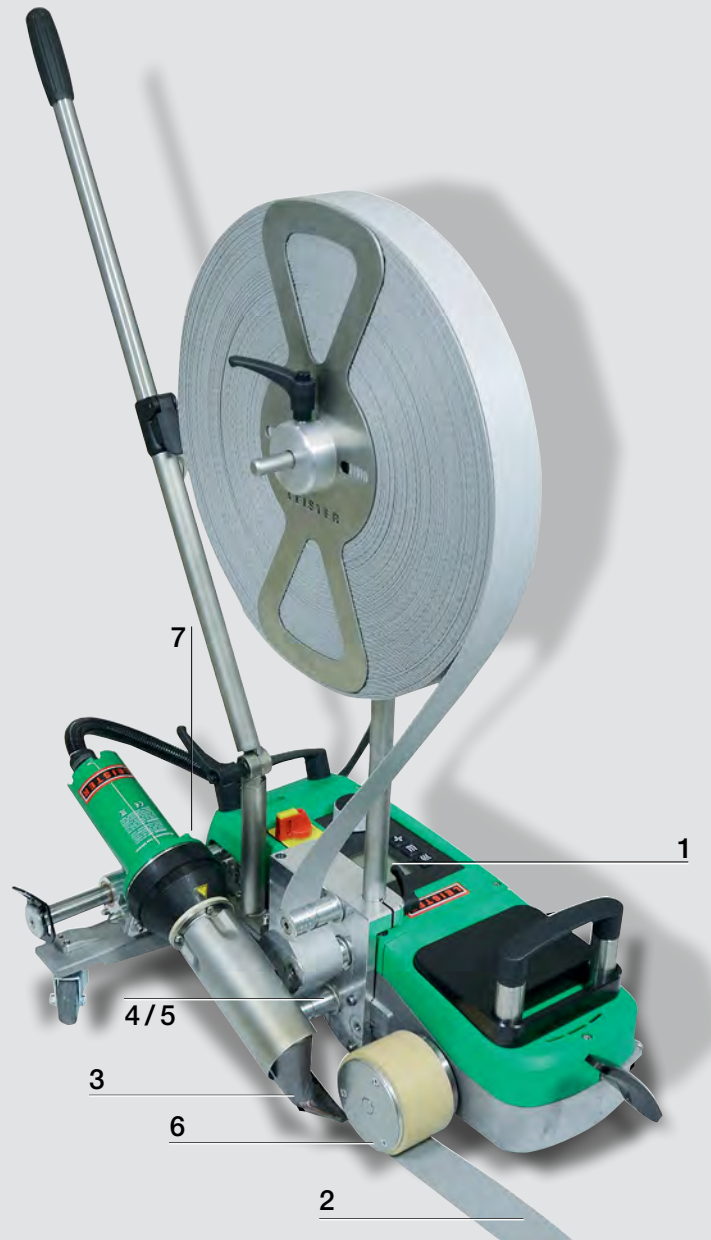



An economical, ergonomic tool for welding reinforcement tapes.

VARIANT T1 TAPE:

Quality, productivity, ergonomics

- Fastest, most precise automatic tape welding machine (up to 59 ft/min, 18 m/min)
- «e-Drive» operating unit
- Easy to use
- Taut tape guidance
- Kits for converting VARIANT T1 overlap to TAPE 1.0 or 2.0 inch (25 or 50 mm)

Technical Data

Voltage	V~	230	400
Power	W	3680	5700
Frequency	Hz	50 / 60	
Temperature	°F °C	212 –1148 100 – 620	
Air flow range	%	50 – 100	
Size (L xW x H)	inch mm	27.5 x 16.3 x 7.3 700 x 415 x 185	
Weight (with 4.9 ft cord)	lbs	62	
(with 1.5 m cord)	kg	28	
Conformity Marking	CE		
Approval mark	Ⓢ		
Certification scheme	CCA		
Protection class I	Ⓛ		

Versions

Description	Voltage	Power	Art. No.
VARIANT T1 TAPE, 1.0 inch, (25 mm) „anti-vandalism“	230 V	3680 W	148.963
VARIANT T1 TAPE, 2.0 inch, (50 mm) standard	230 V	3680 W	148.964
VARIANT T1 TAPE, 1.0 inch, (25 mm) „anti-vandalism“	400 V	5700 W	148.965
VARIANT T1 TAPE, 2.0 inch, (50 mm) standard	400 V	5700 W	148.966
Kit for converting VARIANT T1 Overlap to VARIANT T1 TAPE 1.0 inch (25 mm)			148.961
Kit for converting VARIANT T1 Overlap to VARIANT T1 TAPE 2.0 inch (50 mm)			148.962



Kit for converting VARIANT T1 overlap to VARIANT T1 TAPE 2.0 inch (50 mm)

Art. No.: 148.962



Kit for converting VARIANT T1 overlap to VARIANT T1 TAPE 1.0 inch (25 mm)

Art. No.: 148.961



Kit for converting VARIANT T1 TAPE 2.0 inch to VARIANT T1 TAPE 1.0 inch (50 mm to 25 mm) Art. No.: 149.653



Kit for converting VARIANT T1 TAPE 1.0 inch to VARIANT T1 TAPE 2.0 inch (25 mm to 50 mm) Art. No.: 149.652