



Reflective Braided Sleeving – Neon Yellow



Data sheet

- Material: polyethylene terephthalate (PET)
- Working temperature range : -50°C ---- 125°C
- Flammability : self-extinguishing, met UL VW-1
- Colour : Black, other color upon request.
- Melt pointing: 235°C ± 5
- Customized the pattern and sizes.
- Fray resistant
- Approval : UL,CSA,ROHS

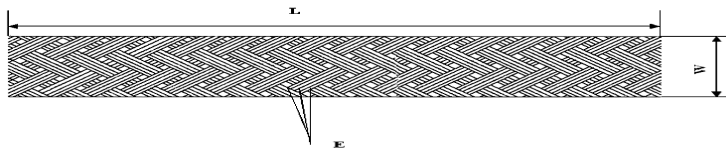

NO.	Specification		Material	Shrink range		Packing (M/Roll)
	MM	INCH		MM	INCH	
ABS-RFT-003	3	1/8"	PET	2.40~6.00	3/32"~1/4"	1000
ABS-RFT-006	6	1/4"	PET	3.20~11.10	1/8"~7/16"	500
ABS-RFT-008	8	5/16"	PET	6.40~12.70	1/4"~1/2"	350
ABS-RFT-010	10	3/8"	PET	4.8~15.90	3/16"~5/8"	350
ABS-RFT-012	12	1/2"	PET	6.40~19.10	1/4"~3/4"	350
ABS-RFT-014	14	14/25"	PET	7.50~23.50	1/3"~8/9"	250
ABS-RFT-016	16	5/8"	PET	9.50~25.40	3/8"~1"	250
ABS-RFT-019	19	3/4"	PET	12.70~31.80	1/2"~1-1/4"	250
ABS-RFT-025	25	1"	PET	15.90~38.10	5/8"~1-1/2"	200
ABS-RFT-032	32	1-1/4"	PET	19.10~44.50	3/4"~1-3/4"	150
ABS-RFT-038	38	1-1/2"	PET	25.40~63.50	1"~2-1/2"	100
ABS-RFT-045	45	1-3/4"	PET	31.80~88.90	1-1/4"~2-3/4"	100
ABS-RFT-050	50	2"	PET	38.10~88.90	1-1/2"~3-1/2"	100
ABS-RFT-064	64	2-1/2"	PET	44.50~114.30	1-3/4"~4-1/2"	100
ABS-RFT-076	76	3"	PET	63.50~120.70	2-1/2"~4-3/4"	100
ABS-RFT-080	80	3-1/6"	PET	50.0~128.50	2"~5"	100

REV. 001		Unit	MM
		Tolerances	X ±2 .X ±0.1 .XX ±0.02
		Date	2011-01-28