

Steinel Hot air tool HG 2220 E 240V

Handy and practical. Lightweight. Tireless. Electronically controlled HG 2220 E hot air tool. 2200 W, infinitely variable temperature setting from 80 - 630°C in 9 steps by thumbwheel. Airflow regulation in 2 stages from 150l/min to 500l/min. Integrated fine dust filter.

A handful of power! A weight of just 610 g is barely worth talking about and makes it very easy to concentrate on the work being done.

Features: 2200-watt brushless motor, rated for 750 hours of operation. The integrated fine dust filter protects internal component in dusty environments. Includes thermal cut-out and slender handle with soft inlay for working safely and in comfort. The outlet nozzle is suitable for fitting standard nozzles.

Service-friendly: The power cord can be changed without opening the enclosure.


Accessories: A comprehensive range of Steinel nozzles and consumables.

Application

- Welding plastics in apparatus construction
- Welding tarpaulins
- Welding floor coverings, plastics
- Welding and mending advertising transparencies, pond liners and roof sheeting as well as bitumen
- Heat-shrinking, shaping, drying and heating processes of all kinds



Welding in Apparatus Construction

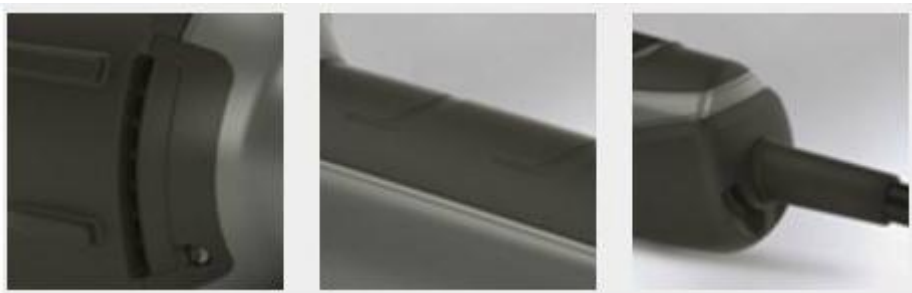

Steinel Hot Air Tool HG 2220 E

Technical specifications electronically controlled hot air gun HG 2220 E	
European Article Number (EAN)	4007841351700
Nominal power consumption	2200 W
Temperature	80-630 °C
With temperature control	Yes
With temperature indication	Yes
Air volume	500 l/min
Air flow control	Positions
Weight of machine	0.610 kg
Dimensions (l x w x h)	337 x 75 x 89 mm
Voltage	220 - 230 V, 50/60 Hz
Min. frequency	50 Hz
Max. frequency	60 Hz
Power consumption	2200 W
Min. temperature range	80 °C
Max. temperature range	630 °C
Temperature regulation	Yes
Temperature setting	infinitely variable in 9 increments by thumbwheel
Min. airflow rate	150 l/min
Max. airflow rate	500 l/min
Airflow regulation	2 stages
Number of stages	2
Heating element	Ceramic
Protection class (without earth terminal)	II
Thermostat	No
Thermal cut-out	Yes
Power cord length	3 m
Weight	0.610 kg
Accessories	Using STEINEL Standard accessories