


# TWINFLEX ACCUKABEL

## ACCUKABEL:

2x4 mm<sup>2</sup>, 2x6 mm<sup>2</sup>, 2x25 mm<sup>2</sup>, 2x35 mm<sup>2</sup>, 2x50 mm<sup>2</sup>, 2x70 mm<sup>2</sup>

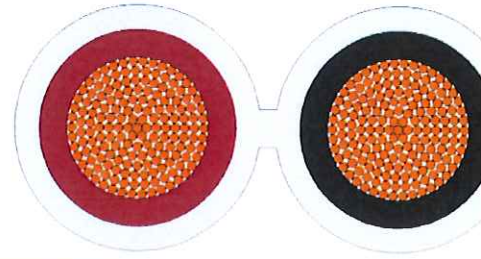

## CONSTRUCTION

Conductor	Electrolytic Annealed Copper (Class 5)
Insulation	PVC (Red, Black)
Sheath	PVC (Transparent)
Cable Diameter (± 5%)	2x4 mm <sup>2</sup> : 5.70 - 12.40
	2x6 mm <sup>2</sup> : 6.30 - 13.60
	2x25 mm <sup>2</sup> : 10.40 - 21.80
	2x35 mm <sup>2</sup> : 11.70 - 24.40
	2x50 mm <sup>2</sup> : 13.50 - 28.00
2x70 mm <sup>2</sup> : 15.30 - 31.60	

## CABLE MARKING

DG FLEX [CROSS SECTION] IEC 245-6 WW/YYYY €€ [METER MARK] [LOTNO-PART NO]

## TECHNICAL AND ELECTRICAL PROPERTIES (20 °C)

Operating Voltage	0.6/1 kV
Test Voltage	3.5 kV
Temperature Range	-40°C***+ 70°C

