

VARIANT T1: Compact, fast and reliable.

This tool's top welding speed of up to 18 m/min and its slim, compact design make it a winning choice.



Very easy hem and piping welds with the hem / piping welding kit.

Hot-air welder

VARIANT T1 Overlap



- Top welding speed up to 18m/min
- Perfect view into the weld seam
- Sturdy and durable for professional use
- Smooth lifting device for precise positioning
- Simple operation due to «e-Drive» operating concept


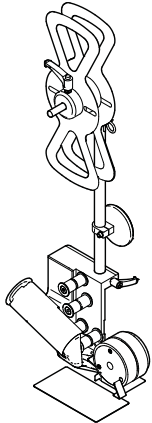






Technical Data		
Voltage	V~	230 / 400 (2LNPE)
Power	W	3680 / 5700
Temperature	°C	100 – 620
Speed	m/min	1.5 – 18
Air flow range	%	40 – 100
Welding seam width	mm	20 or 40
Size (L x W x H)	mm	500 x 400 x 195
Weight	kg	22 (without 1.5 m cord)
Conformity mark		CE
Protection class I		⊕

Article No.:

141.891	VARIANT T1, 230 V / 3680 W, 40 mm nozzle, with Euro plug
141.892	VARIANT T1, 230 V / 3680 W, 20 mm nozzle, with Euro plug
141.893	VARIANT T1, 400 V / 5700 W, 40 mm nozzle, with CEE plug (3LNPE)
141.894	VARIANT T1, 400 V / 5700 W, 20 mm nozzle, with CEE plug (3LNPE)

Additional versions available upon request.

Accessories VARIANT T1 Overlap

	142.650 Hem / piping welding kit complete, comprising: 142.221 Hold-down device 141.326 Piping roll 140.530 Hem / piping add-on part
	148.961 Conversion kit, VARIANT T1 Overlap to VARIANT T1 TAPE 25 mm 148.962 Conversion kit, VARIANT T1 Overlap to VARIANT T1 TAPE 50 mm
	139.438 Additional weight 3 kg
	116.798 Brass brush
	140.771 Overlap welding nozzle 20 mm
	141.558 Overlap welding nozzle 40 mm
	140.429 25 mm pressure roller complete 138.938 45 mm pressure roller complete
	142.705 Sturdy storage case
	Heating elements 107.612 230 V 107.613 400 V

Technical Textiles & Industrial Fabrics