

CGEL 1000 & CGEL 2000



Features & Benefits


- Tough outer case with cross linked polymer gel filling which meets class 2 of C.E.I. 64-8 and ANSI C119.90C operating temperature.
- Flame retarded to I.E.C.332-1.
- Resistant to repeated flexing and torsion.
- Unlimited shelf life.
- Available in two complete ranges:
- CGEL 2000, suitable for 30° branch connections on 0.6/1kV extruded cables.
- CGEL 1000, suitable for straight or multiple branch connections on 0.6/1kV extruded cables.




Applications

For fast and reliable installation of Straight and Branch connections for power, control and communication cables in all areas.

PRODUCT	MAIN CABLE	BRANCH CABLE	PRODUCT	MAIN CABLE	BRANCH CABLE
	C.S.A.	C.S.A.		C.S.A.	C.S.A.
	mm ²	mm ²		mm ²	mm ²
CGEL 1000	1x 2.5-50	1x 1.5-10	CGEL 2000	1x 2.5-25	1x 1.5-16
	2x 2.5-6	2x 1.5			
CGEL 1001	1x 6-95	1x 1.5-35	CGEL 2001	1x 6-95	1x 1.5-70
	2x 1.5-16	2x 1.5-6		2x 1.5-16	2x 1.5-10
	3x 1.5-10	3x 1.5-6		3x 2.5-16	3x 1.5-10
	4x 1.5-10	4x 1.5-4		4x 2.5-10	4x 1.5-6
CGEL 1002	1x 50-185	1x 16-185	CGEL 2002	1x 50-150	1x 1.5-70
	2x 10-35	2x 1.5-35		2x 1.5-25	2x 1.5-10
	3x 6-35	3x 1.5-35		3x 4-25	3x 1.5-10
	4x 6-35	4x 1.5-16		4x 4-16	4x 1.5-6

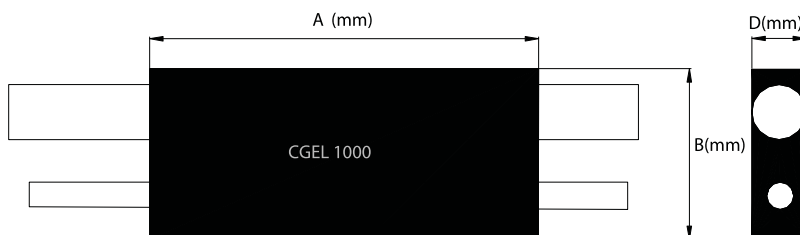

	A	B	D
1000	95	43	28
1001	150	56	28
1002	220	85	46

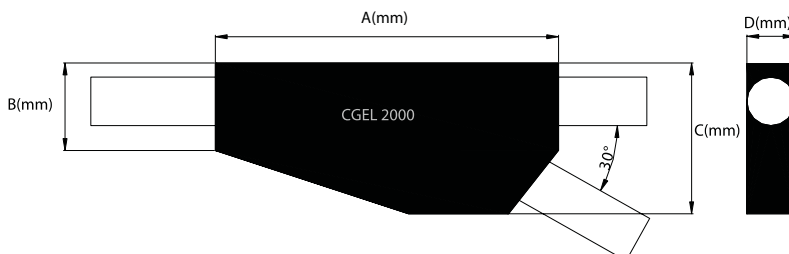

	A	B	C	D
2000	75	30	40	21
2001	125	36	56	35
2002	185	47	75	43