
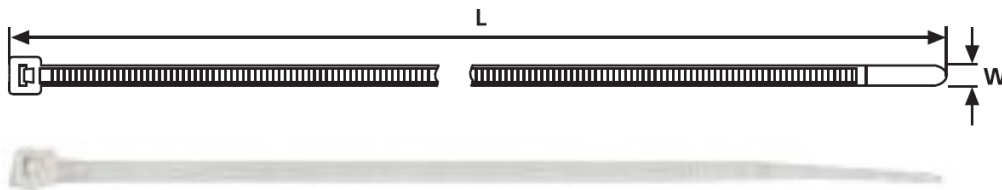


Polyamide T18L Cable Ties

These cables ties feature internal serrations allowing for a positive hold onto cable, hose and pipe bundles.

The design of the head guarantees a high tensile strength whilst allowing a very low insertion force. This, combined with the bent tail design of many of the ties, ensures a simple and quick installation.

Whilst easily installed by hand, manual and pneumatic (for high volume applications) tensioning tools are available to ensure a consistent and safe installation.

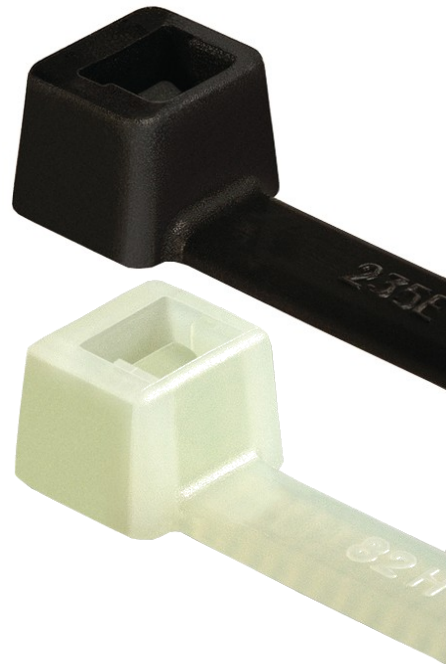

Product Family	T-Series in PA66 natural
Variant	Inside Serrated
Bundle Max	55.0mm / 2.17"
Bundle Min	1.5mm / 0.06"
Length (L)	205mm / 8"
Width (W)	2.5mm / 0.1"
Min tensile strength	18lbs / 80N
Flammability	UL94 V2
Halogen free	Yes
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40°C to +85°C (+105°C, 500h)
Specification	UL ZODZ2.E64963, DIN 30015955, GL86 137-81 HH, BV 03856/H0 BV