


## PVC Battery / Welding Cables

### PVC Battery / Welding Cables

Single insulated extra flexible battery/welding cables designed for use in tough working environments.

- Resistant to petrol, lubricating oils and diluted acids.  
Plain copper conductors - PVC insulated -30°C to +70°C.

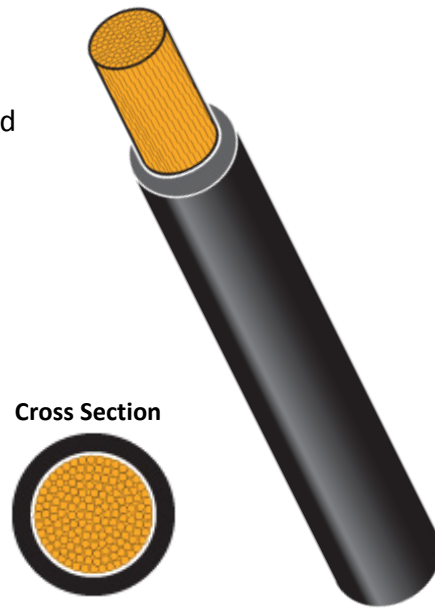

Part No	Conductor Specification (mm)	Conductor Cross Section (mm <sup>2</sup> )	Nominal Current Rating (Amps)	Maximum Overall Diameter (mm)	Resistance Per Metre At 20°C (Ohms)	Sheath Colours	Reel Sizes (Metres)
PVC 10	288/0.20	10	70	7.6	0.00191	Black, Red	100
PVC 16	203/0.30	16	110	8.3	0.00126	Black, Red	10 30 100
PVC 20	266/0.30	20	135	9	0.00096	Black, Red	10 30 100
PVC 25	322/0.30	25	170	10.1	0.00077	Black, Red	10 30 100
PVC 35	455/0.30	35	240	11.8	0.00056	Black, Red	10 30 100
PVC 40	539/0.30	40	300	12.7	0.0005	Black, Red	10 30 50
PVC 50	637/0.30	50	345	13.3	0.00039	Black, Red	10 30 50
PVC 60	805/0.30	60	415	15	0.00033	Black, Red	10 30 50
PVC 70	912/0.30	70	485	15.5	0.00029	Black, Red	10 30 50
PVC 95	684/0.40	95	500	17.9	0.0002	Black, Red	10 50
PVC 120	888/0.40	120	600	19.7	0.00015	Black, Red	10 50
PVC 150	1184/0.40	150	700	22	0.00011	Black, Red	50