

# TRANSLUCENT PEROXIDE SILICONE DAIRY TUBING

Peroxide silicone, or 'dairy tubing', is ideal for use in the dairy industry due to its high mechanical wear and the excellent tear strength characteristics. Silicone rubber is a very clean and odourless product that is often used in food and medical applications.


Silicone peroxide tubing is popular for use in general tubing applications. It can be used for a wide range of pump and liquid transfer applications due to the good durability and strength that the material offers. The economical pricing also makes this product popular in both automotive and industrial applications.

Peroxide silicone rubber is extremely heat and cold resistant, and can be used in environments from -40°C to +200°C.

PROPERTIES	VALUES
Compound	Silicone
Density [Specific Gravity]	1.14 g/cm <sup>3</sup>
Tensile Strength	6 N/mm <sup>2</sup>
Elongation at Break	1200%
Minimum Temperature	-40°C
Maximum Temperature	+200°C

## Sizes Available

Inner diameter	Outer diameter	Wall thickness
7mm	15mm	4mm
7mm	14mm	3.5mm
14mm	24mm	5mm
12mm	21mm	4.5mm
16mm	26mm	5mm
19mm	31mm	6mm

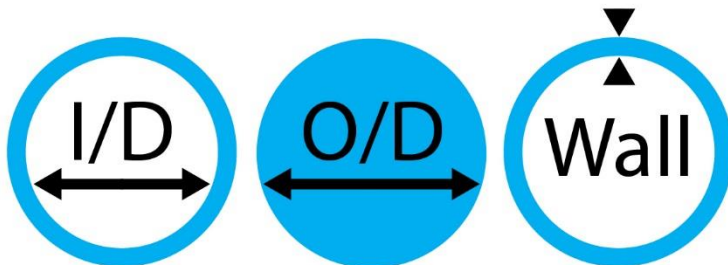

Hilltop Products Ltd Parkside Business Park Kirkstead Way Golborne,  
Warrington WA3 3PY

Tel: 01942 723101  
Fax: 01942 273817

sales@hilltop-products.co.uk  
www.hilltop-products.co.uk

