

# Polyester non-heat Shrinkable Weaved Sleeving




Hilltop polyester non-heat shrinkable weave sleeving consist of polyester multifilament. With the particularly smooth inner wall, it could reduce the frictional resistance problems, and provides easy installation. The tight woven construction can provide chemical fluid resistance and noise reduction.

## Application



It is widely used to protect hydraulic pipes, rubber hose, plastic pipes and wire harnesses from damage. This kind of sleeving can also be used in industrial and construction fields where outstanding hose protections are needed.

## Drawing

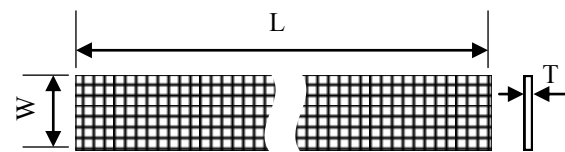

Datasheet				
Part No	Flat Width (W)	Round I.D.	Wall thickness (T)	Packing (L)
NSSP-020	20	12	1.1	100m/spool
NSSP-025	25	15	1.1	100m/spool
NSSP-030	30	19	1.1	100m/spool
NSSP-035	35	22	1.1	50m/spool
NSSP-040	40	25	1.1	50m/spool
NSSP-045	45	28	1.1	50m/spool
NSSP-050	50	31	1.1	50m/spool
NSSP-060	60	38	1.1	50m/spool
NSSP-070	70	44	1.1	50m/spool
NSSP-080	80	50	1.1	50m/spool
NSSP-090	90	57	1.1	50m/spool
NSSP-100	100	60	1.1	50m/spool
NSSP-115	115	70	1.1	50m/spool
NSSP-145	145	90	1.1	50m/spool
NSSP-176	176	110	1.1	50m/spool
NSSP-200	200	125	1.1	50m/spool



Technical Data	
Material:	Polyester Multifilament
Operating Temperature:	-50°C ~ 150°C
Melting Point:	230°C
Flammability:	VW-1
Standard Colour:	Black
Cutting Tool:	Scissor and hot knife
Approval:	RoHS

Unit: mm