


Thin Wall 2 Core Auto Cables (Flat Twin)

Thin Wall 2 Core Auto Cables (Flat Twin)

Cores manufactured to ISO6722-1:2011 (Class B) 105°C. Plain copper conductors - PVC sheathed 70°C

We stock a variety of sheath colours and core colours, please contact the sales department for an up to date list.

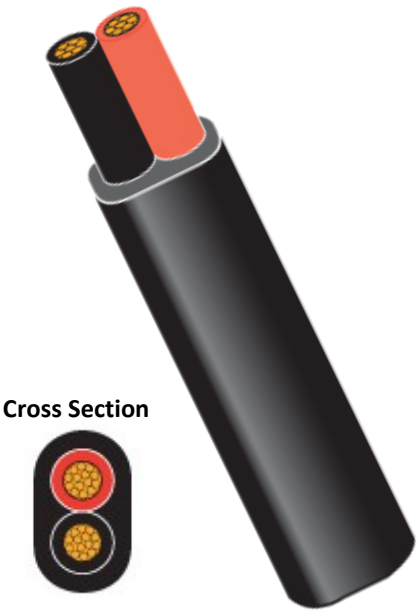

Part No	Conductor Specification (mm)	Conductor Cross Section (mm²)	Nominal Current Rating (Amps)	Maximum Overall Dimensions (mm)	Sheath Colour	Core Colours	Reel Sizes (Metres)
TW02/06	2 x 16/0.20	2 x 0.5	11	3.5 x 5.5	Black	Black Red	30 100
TW02/04	2 x 24/0.20	2 x 0.75	14	3.5 x 5.5	Black		30 100
TW02/01	2 x 32/0.20	2 x 1.0	16.5	3.0 x 5.0	Black		30 50 100 500
TW02/05	2 x 21/0.30	2 x 1.5	21	3.4 x 5.7	Black		30 100
TW02/02	2 x 28/0.30	2 x 2.0	25	3.5 x 6.1	Black		30 50 100
TW02/07	2 x 35/0.30	2 x 2.5	29	3.8 x 6.6	Black		30 100
TW02/08	2 x 44/0.30	2 x 3.0	33	4.4 x 7.6	Black		30 100
TW02/09	2 x 65/0.30	2 x 4.5	42	5.7 x 9.5	Black		30 100

Thin Wall 2 Core Auto Cables (Flat Twin)